


24-36-24 FRP

Fiber Reinforced Plastic




COVER

- Model: 24" x 36"
- Style: Flush Solid
- Material: Polymer Concrete
- Weight: 104 lbs
- Height: 3"
- Rating and standard: Tier 15, ANSI
- Option: Custom logo
- Lift points: 1/4" SS Rod
- Fasteners: 3/8-16 x 3" SS Hex Bolt

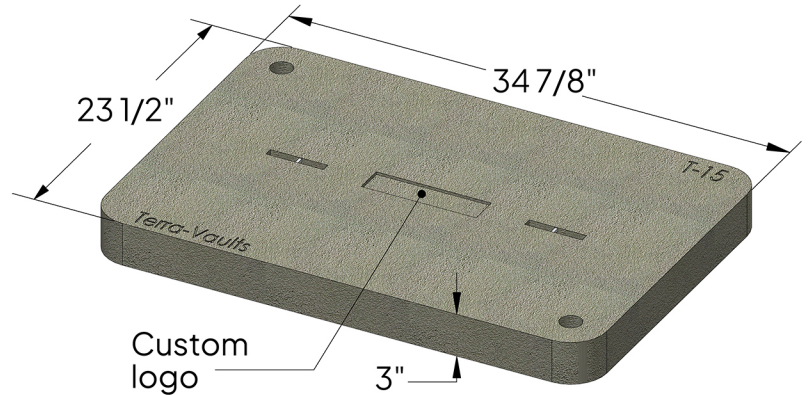

BODY

- Material: FRP/Poly concrete (Hybrid)
- Model: 24" x 36"
- Dimension: 37" x 25 1/2"
- Height: 23 1/2"
- Weight: 97 lbs
- Lifting Loop: 1/8" Aircraft cable

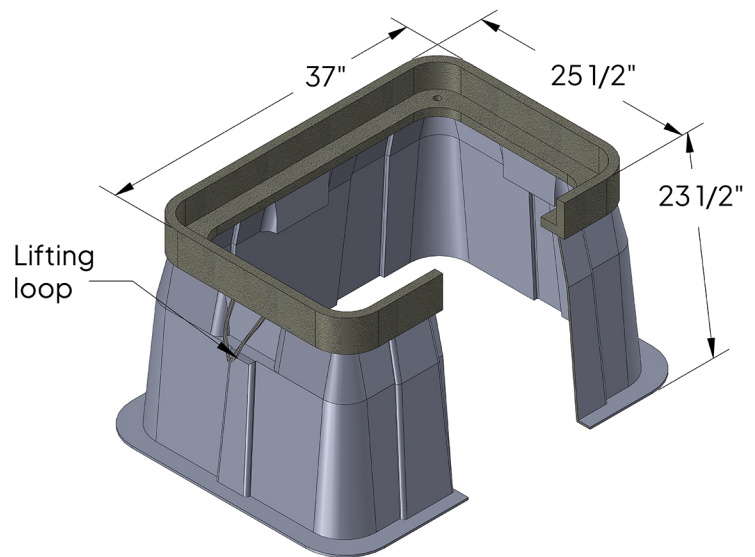

LOAD REQUIREMENT

Vertical Load

Design Load: 15,000 lbs

Test Load: 22,500 lbs

Lateral Load

Design Load: 2,400 lbs

Test Load: 3,600 lbs



FEATURES

- Water Resistant
- Corrosion and UV Resistant
- Impact Resistant
- Reinforced Strength



COVER OPTIONS

- Polymer single piece
- Solid Steel

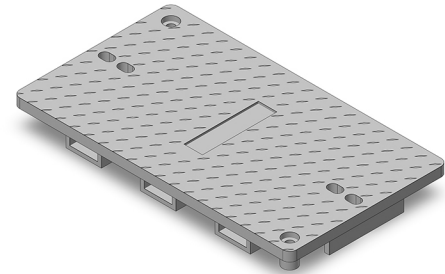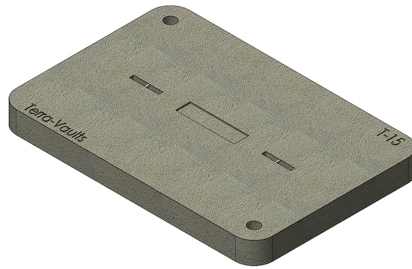


CUSTOMIZED NAMEPLATE

Any nameplates can be customized

Standard nameplates

- Electric
- Water
- Fiber Optics
- Telephone
- Communications


ASSEMBLY

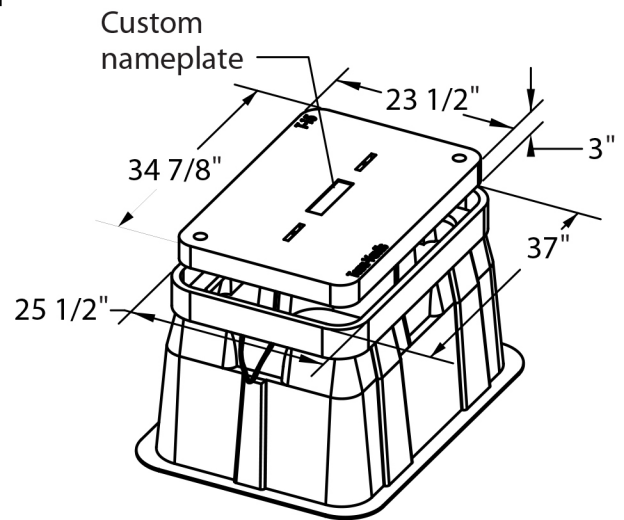

SHIPPING CONFIGURATION

Model	Assembly Weight	Pallet Dimensions	Pallet Height (A)	FRP/ Pallet	Pallets/ Load	Total FRP/ Load	Load Wt
2436-24	200 lbs	44" x 40"	73 1/4"	6	28	168	33,600 lbs

Pallet quantity: 6

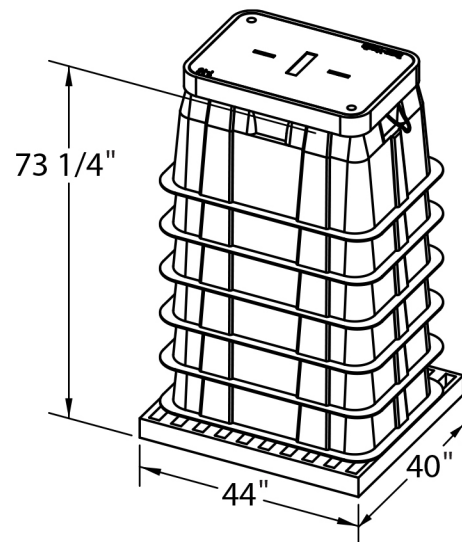

Note: All dimensions and weights are approximate