


48–60 Series Polymer Concrete




COVER

- Model: 48" x 60"
- Style: Flush Solid
- Material: Poly Concrete
- Weight: 396 lbs
- Height: 3"
- Rating and standard: Tier 22, ANSI
- Option: Custom logo
- Lift points: 1/4" SS Rod
- Fasteners: 3/8–16 x 3" SS Hex Bolt
- Drop in beam: 3" x 3"

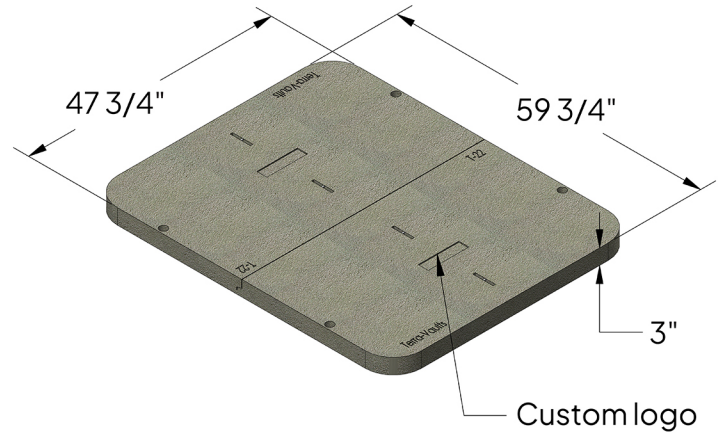

BODY

- Material: Polymer Concrete
- Model: 48" x 60"
- Wall type: Plain

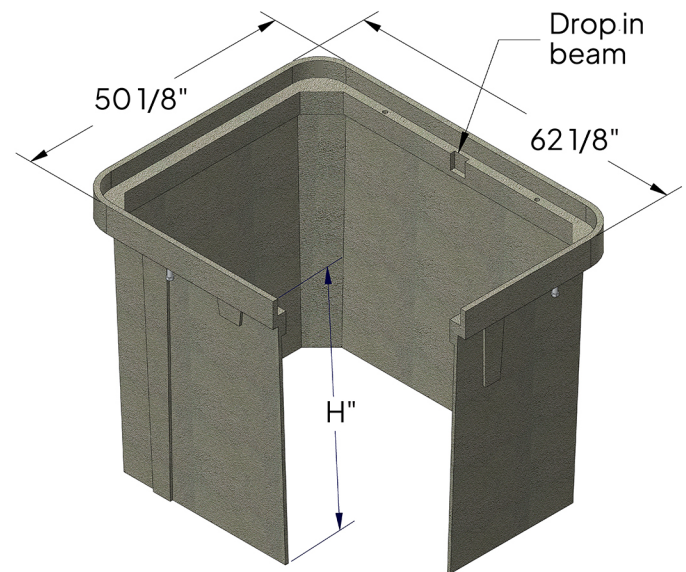

Model	L	W	H	Body Weight
4860–36	62 1/8"	50 1/8"	36"	744 lbs
4860–48	62 1/8"	50 1/8"	48"	992 lbs

LOAD REQUIREMENT

Vertical Load

Design Load: 22,500 lbs

Test Load: 33,750 lbs

Lateral Load

Design Load: 2,400 lbs

Test Load: 3,600 lbs



FEATURES

- Water Resistant
- Corrosion and UV Resistant
- Impact Resistant
- Reinforced Strength



COVER OPTIONS

- Polymer two-piece
- Solid Steel

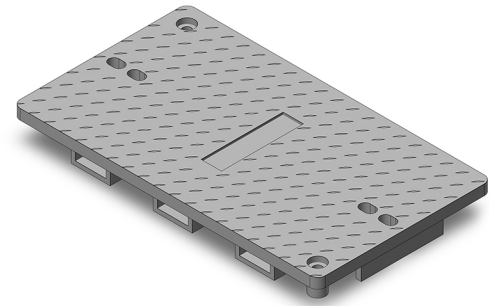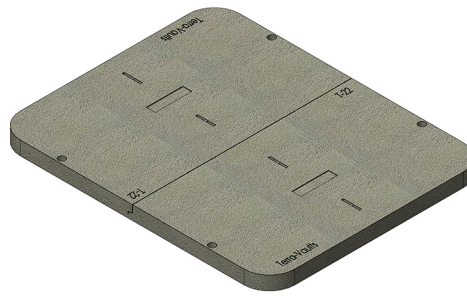


CUSTOMIZED NAMEPLATE

Any nameplates can be customized

Standard nameplates

- Electric
- Water
- Fiber Optics
- Telephone
- Communications

ASSEMBLY

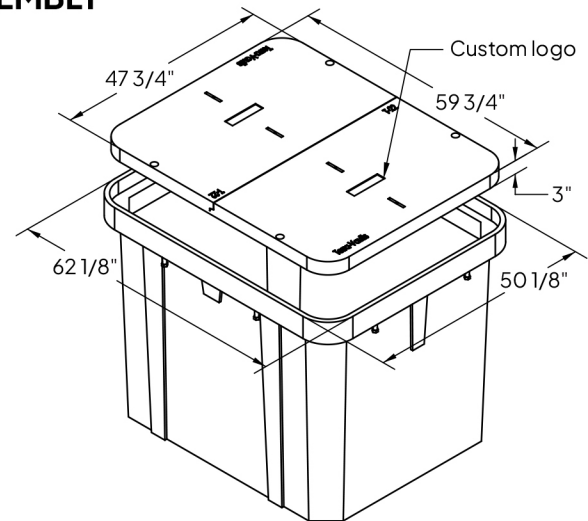

SHIPPING CONFIGURATION

Model	Assembly Weight	Pallet Dimensions	Pallet Height (A)	Vaults/ Pallet	Pallets/ Load	Total Vaults/ Load	Load Wt
4860-36	1,140 lbs	68" x 48"	40"	1	16	16	18,240 lbs
4860-48	1,388 lbs	68" x 48"	52"	1	12	12	16,656 lbs

Note: All dimensions and weights are approximate

Pallet quantity: 1

